



LIDERKIT GROUP

Pol. Ind. El Guadiel Tel. + 34 953 67 80 41
 Avd. Linares, 17 Fax. + 34 953 67 63 52
 23210 Guarroman www.liderkit.com
 Jaen (SPAIN)




MODEL 646. PLYWOOD KIT 17MM

Roof :Made of translucent polyester 1,6mm thickness, reinforce using omegas of galvanized steel omegas (DX-F5 cold lamination) 1mm thickness, every 600mm.All this parts are screwed and glued during the fabrication process .
 The perimeter is made of aluminium profiles (alloy 6005)

Sidewalls and frontwall: Plywood panel of 17mm thickness. Fire resistant panel, factor M2. Aluminium profiles (alloy 6005). Exterior part of the board in RAL 9010

Rear frame: Made of galvanized steel DX51 Z275 MAC 2,5 mm thickness, reinforced in the squares, semiautomatic welding.

Rear doors: Sandwich panel of 30mm thickness, composed by polyester 1,6mm/ polystyrene (44kg/m3)/ polyester 1,6mm. Fire resistant panel, factor M3. Stainless steel AISI 304 locks and hinges, recessed locks.

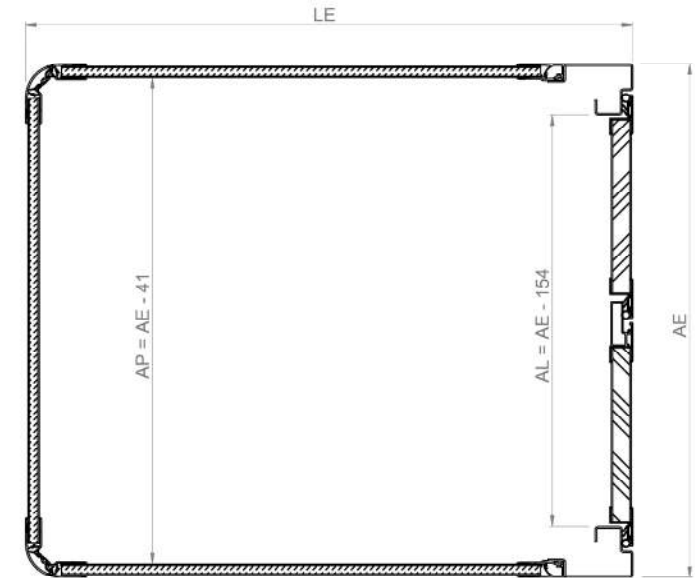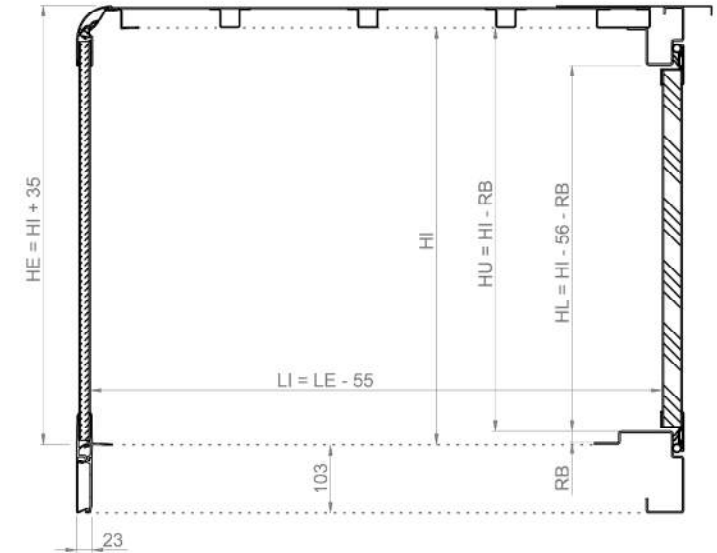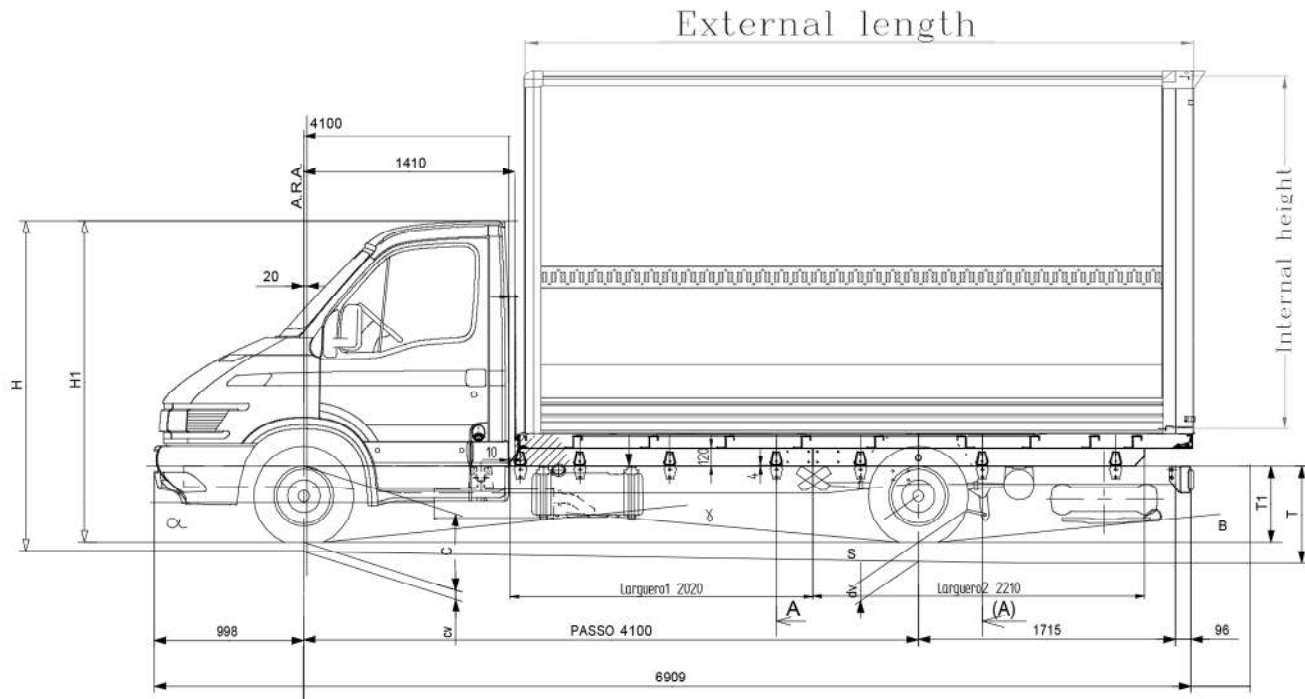

Test of maximum
resistance of
load rails



Safety of loads
XL EN 12642



Quality management
certificate



Environmental
management
certificate